

airvent

SM Press Vent






SM Press Vent pressure-sensitive vents for automatic air intake and prevention from excessive ventilation.



more

- ✓ Precise manual adjustment of two shutters
- ✓ Flow stabiliser in air intake
- ✓ Air flow up to 30m³/h
- ✓ Aesthetic, slim design
- ✓ Health-friendly – PZH certified
- ✓ Two air streams – air intake at the top or bottom
- ✓ Installation in aluminium windows with sleeves
- ✓ Manufactured of quality ABS plastic
- ✓ Possibility to install a flat grill instead of air intake (for installation with exterior blinds)
- ✓ Air intake with an insect grill

available colours

- | | | | | | |
|---|---------------------------------------|---|---|------------|----------|
|  | White |  | Brown | RAL 8017 | |
|  | Anthracite | RAL 7016 |  | Golden oak | RAL 8003 |
|  | Bespoke colours available at request. | | | | |

Sets with mixed colours are also available, e.g. hood - golden oak, regulator – white.

BROOKVENT

airvent

SM Press Vent

Dimensions

(width x height x depth)



Regulator: 430 x 21 x 23 [mm]



Intake: 430 x 21 x 23 [mm]



GPE2A flat grill: 390 x 20 x 3 [mm]

Suitable for all types of window frame construction

Air flow

Position	Pressure	Air flow
SM Press Vent		
Open	20Pa	30 m ³ /h
Open	10Pa	22 m ³ /h

Instructions for designer

Negative pressure of 20 Pa should be assumed for calculations of fresh air intake for mechanical extraction ventilation systems.

Installation

As a standard, the SM Press Vents are screwed to the joinery. For installation in windows with exterior blinds, use the GPE 2A flat grid.


Notch size:



* specifications for notch size 12 mm

Sound insulation

Vent (open)	Dn,e,w (Ctr)
SM Press Vent	32 dB

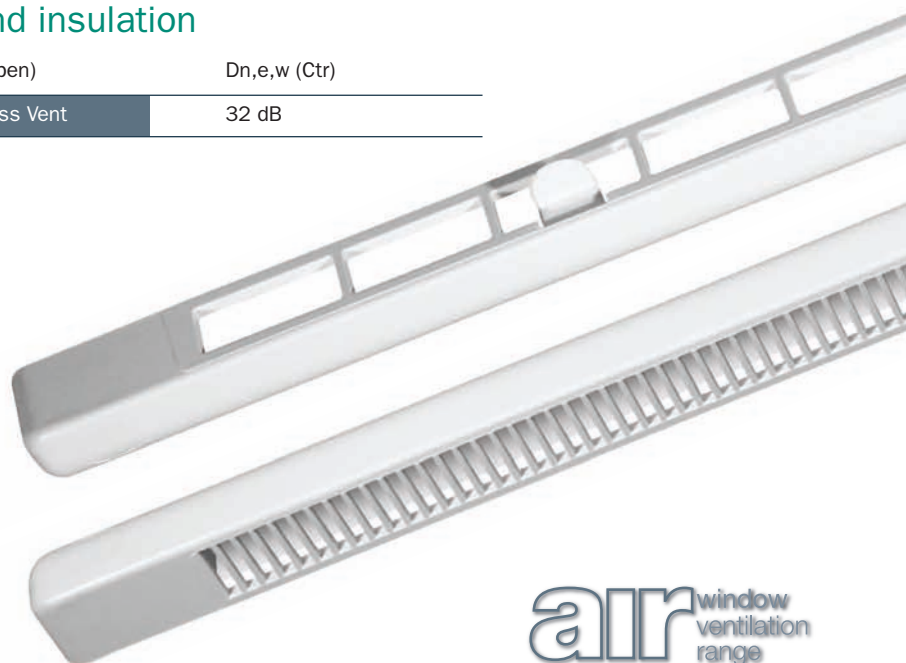

BROOKVENT Polska Sp. z o.o.

ul. Kościuszki 14-16
55 - 120 Oborniki Śląskie

T +48 71 3105282

F +48 71 7503622

E informacja@brookvent.pl

www.brookvent.pl

air window
ventilation
range