

airvent



SM Tip Vent

SM Tip Vent with precise regulation of airflow.
Manufactured of quality ABS plastic.



more

- ✓ Precise manual adjustment of two shutters
- ✓ Aesthetic, slim design
- ✓ Health-friendly – PZH certified
- ✓ Two air streams – air intake at the top or bottom
- ✓ Installation in aluminium windows with sleeves
- ✓ Possibility to install a flat grill instead of air intake (for installation with exterior blinds)
- ✓ Air intake with an insect grill

available colours



White



Anthracite RAL 7016



Bespoke colours available
at request.



Brown RAL 8017



Golden oak RAL 8003

Sets with mixed colours are also available, e.g. hood - golden oak,
regulator – white.

BROOKVENT

airvent

SM Tip Vent

Dimensions

(width x height x depth)



Regulator: 430 x 21 x 23 [mm]



Intake: 430 x 21 x 23 [mm]



GPE2A flat grill: 390 x 20 x 3 [mm]

Suitable for all types of window frame construction

Air flow

Position	Pressure	Air flow
SM Tip Vent		
Open	20Pa	40 m ³ /h
Open	10Pa	30 m ³ /h

Instructions for designer

Negative pressure of 20 Pa should be assumed for calculations of fresh air intake for mechanical extraction ventilation systems.

Installation

As a standard, the SM Tip Vents are screwed to the joinery. For installation in windows with exterior blinds, use the GPE2A flat grid.


Notch size:



* specifications for notch size 12 mm

Sound insulation

Vent (open)	Dn,e,w (Ctr)
SM Tip Vent	31 dB

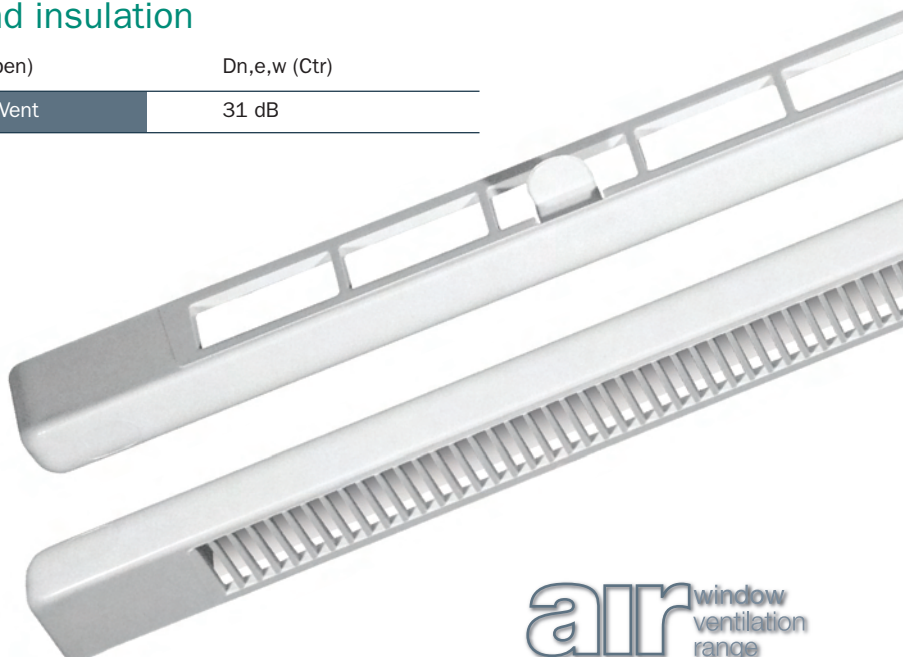

BROOKVENT Polska Sp. z o.o.

ul. Kościuszki 14-16
55 - 120 Oborniki Śląskie

T +48 71 3105282
F +48 71 7503622
E informacja@brookvent.pl

www.brookvent.pl

air window
ventilation
range